

HEATED HOLDING**VULCAN****VPT SERIES
PASS THROUGH HOLDING CABINETS****Model VPT15**

Select models only.



UL Listed. UL Listed to Canadian safety standards.
Classified by UL to NSF Std. #4.

SPECIFICATIONS

Vulcan Model No. VPT pass through holding cabinets. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid). Simple knob actuated electronic control for holding at temperatures up to 190°F. Adjustable racking will hold 18" x 26" or 12" x 20" pans or a combination of both on 1½" centers. Lip-load racking will hold 18" x 26" pans on 3" centers. Shelving will hold a variety of pan sizes. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted handles, magnetic action door latch, and full insulation; 1½" in side walls and 2" in top. Integrated stainless steel frame for maximum strength. Field reversible doors. Complete with side mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements. ENERGY STAR® certified (all models except model VPT18).

Units with adjustable racking:

- ☐ **VPT7** (see reverse for capacities)
- ☐ **VPT13** (see reverse for capacities)
- ☐ **VPT15** (see reverse for capacities)
- ☐ **VPT18** (see reverse for capacities)

Units with lip-load racking:

- ☐ **VPT7LL** (Fifteen 18" x 26" x 1" sheet pans)
- ☐ **VPT15LL** (Thirty 18" x 26" x 1" sheet pans)

Units with shelves:

- ☐ **VPT7SL** (Three Shelves)
- ☐ **VPT15SL** (Six Shelves)

STANDARD FEATURES

- Pass-Thru Holding Capacity:
 - 18" x 26" sheet pans.
 - 12" x 20" pans, or a combination of both on 1½" centers.
 - Other pan sizes on shelves.
- Blower motor for gentle and even temperature distribution.
- Dutch doors (VPT15 and VPT18).
- 5" heavy duty casters (2 swivel with brakes and 2 rigid).
- Recessed side mounted handles.
- Simple knob actuated electronic control for holding at temperatures up to 190°F.
- Universal tray slides adjustable on 1½" centers.
VPT15 & VPT13 ship with 10 pairs of tray slides, VPT7 ships with 5 pairs and VPT18 ships with 15 pairs.
- Interior and the exterior are both constructed out of 20 gauge stainless steel.
- Fully insulated with 1½" in side walls and 2" in top.
- Integrated stainless steel frame for maximum strength.
- Magnetic action door latch.
- Field reversible doors.
- Side mounted cord.
- Complete with cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts.
- One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements.
- ENERGY STAR® certified (all models except model VPT18).

OPTIONS

- ☐ 208/240 volt
- ☐ Humidity pan
- ☐ Full perimeter bumper
- ☐ Glass Dutch doors (VPT15 & VPT7 only)
- ☐ Wire shelves to sit on tray slides (RACK-VCH)
- ☐ Additional tray slides

VULCAN


a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602




VPT SERIES PASS THROUGH HOLDING CABINETS


Drawings shown with
optional bumper

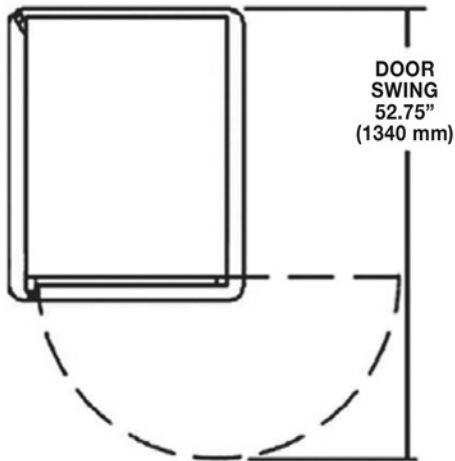


All Models Top View

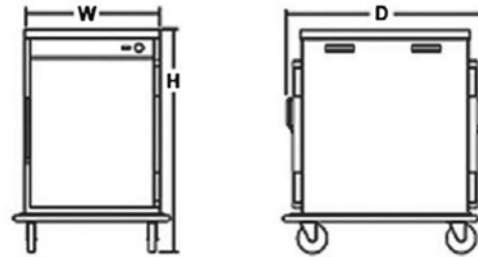

VPT7 Front & Side Views

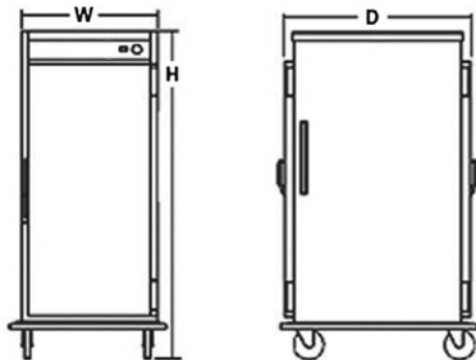

VPT13 Front & Side Views

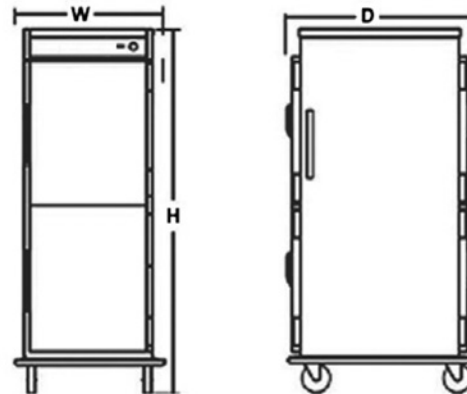

VPT15 Front & Side Views

MODEL	DIMENSIONS	CAPACITY		ELECTRICAL			SHIPPING WEIGHTS	
	EXTERIOR	12" x 20" x 2½" PANS	18" x 26" SHEET PANS	VOLTS	WATTS	AMPS	LBS	KG
VPT7	27" W x 34½" D x 40" H	14	7	120/240	1,500	12.5	198	90
VPT7LL	27" W x 34½" D x 40" H	NA	15	120/240	1,500	12.5	198	90
VPT7SL	27" W x 34½" D x 40" H	Unit comes with 3 shelves		120/240	1,500	12.5	198	90
VPT13	27" W x 34½" D x 61" H	26	13	120/240	1,500	12.5	270	123
VPT15	27" W x 34½" D x 66½" H	30	15	120/240	1,500	12.5	297	135
VPT15LL	27" W x 34½" D x 66½" H	NA	30	120/240	1,500	12.5	297	135
VPT15SL	27" W x 34½" D x 66½" H	Unit comes with 6 shelves		120/240	1,500	12.5	297	135
VPT18	27" W x 34½" D x 73½" H	36	18	120/240	1,500	12.5	337	153

*per compartment

Optional bumper adds ¾" to the width and ⅝" to the depth.



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.